

PJUUR®

imagine invisible

- Imagine Invisible -

PJUUR® offers a completely new range of high quality 'invisible solutions' for practical components and facilities that are necessities. Our product range is inspired by 'the essences', which are lightness, unity, purity in detail and its materials.

PJUUR®

imagine invisible

PRODUCT RANGE

| | |
|---------|---|
| EVEN | Recessed frames for power outlets, wall switches, domotics, ... |
| SMOOTH | Recessed frames and covers for power outlets. |
| PHANTOM | Recessed Wall frames for BACHMANN® Twist. |
| WAY OUT | Recessed frames and kits for lighting canopies and suspension points. |
| A/B/D/S | Recessed frames and spot lighting. |
| AERO S | Recessed round and square frames and air vents. |
| AERO M | Recessed round frames and air vents for mid-range flow. |

Our solutions reduce the presence of architectural, yet valuable, functions by harmonizing them in its surrounding environment. They combine convenience with (visual) comfort. PJJUR® aims to achieve essential quality and balance.

Unique in its kind, PJJUR® provides 2 installation options for each function to facilitate the seamless integration for both drywall-system and plastering brick or concrete:

| | |
|-----------|--|
| HW | Trimless frames for drywall-systems, installed according to drywall-panels of 12,5mm thickness. |
| ST | Trimless frames for brickwork or concrete, which only need a finishing layer of 4-6mm plasterwork. |

MATERIALS

Within the technical development of the product range all aspects were considered to provide a step-by-step and easy-to-install nearly invisible solution. PJJUR® developed its own material composition mainly consisting of natural gypsum ($\text{CaSO}_4 \cdot 2\text{H}_2\text{O}$ / calcium sulfate dihydrate) and other all-natural additives.

This results in easy to finish, high strength, heat and fire-resistant products. Because the applied material has the exact same density and thermal behaviour as drywall and/or plasterwork, a polished and smooth result without cracks can be assured.

REDUCE - REUSE - RECYCLE

PJJUR® strives for an optimal balance between new and recycled resources. During the manufacturing process we consider the consequence of each part, material, process, and way of handling on the environment. Our process is continuously monitored, evaluated and optimized during the chain of development and production. We have a network of local suppliers and aim to produce locally whenever possible (considering technical and economic feasibility).


Only in cases in which even the most inventive solutions cannot create the optimal situation, PJJUR® has decided to use only prime materials which can be split-up and recycled easily.

To truly fulfil our commitment to protecting the planet and its resources for future generations, PJJUR® commits and donates at least 1% of its annual net revenues to a local environmental organization.

PJJUR®

PROJECTS



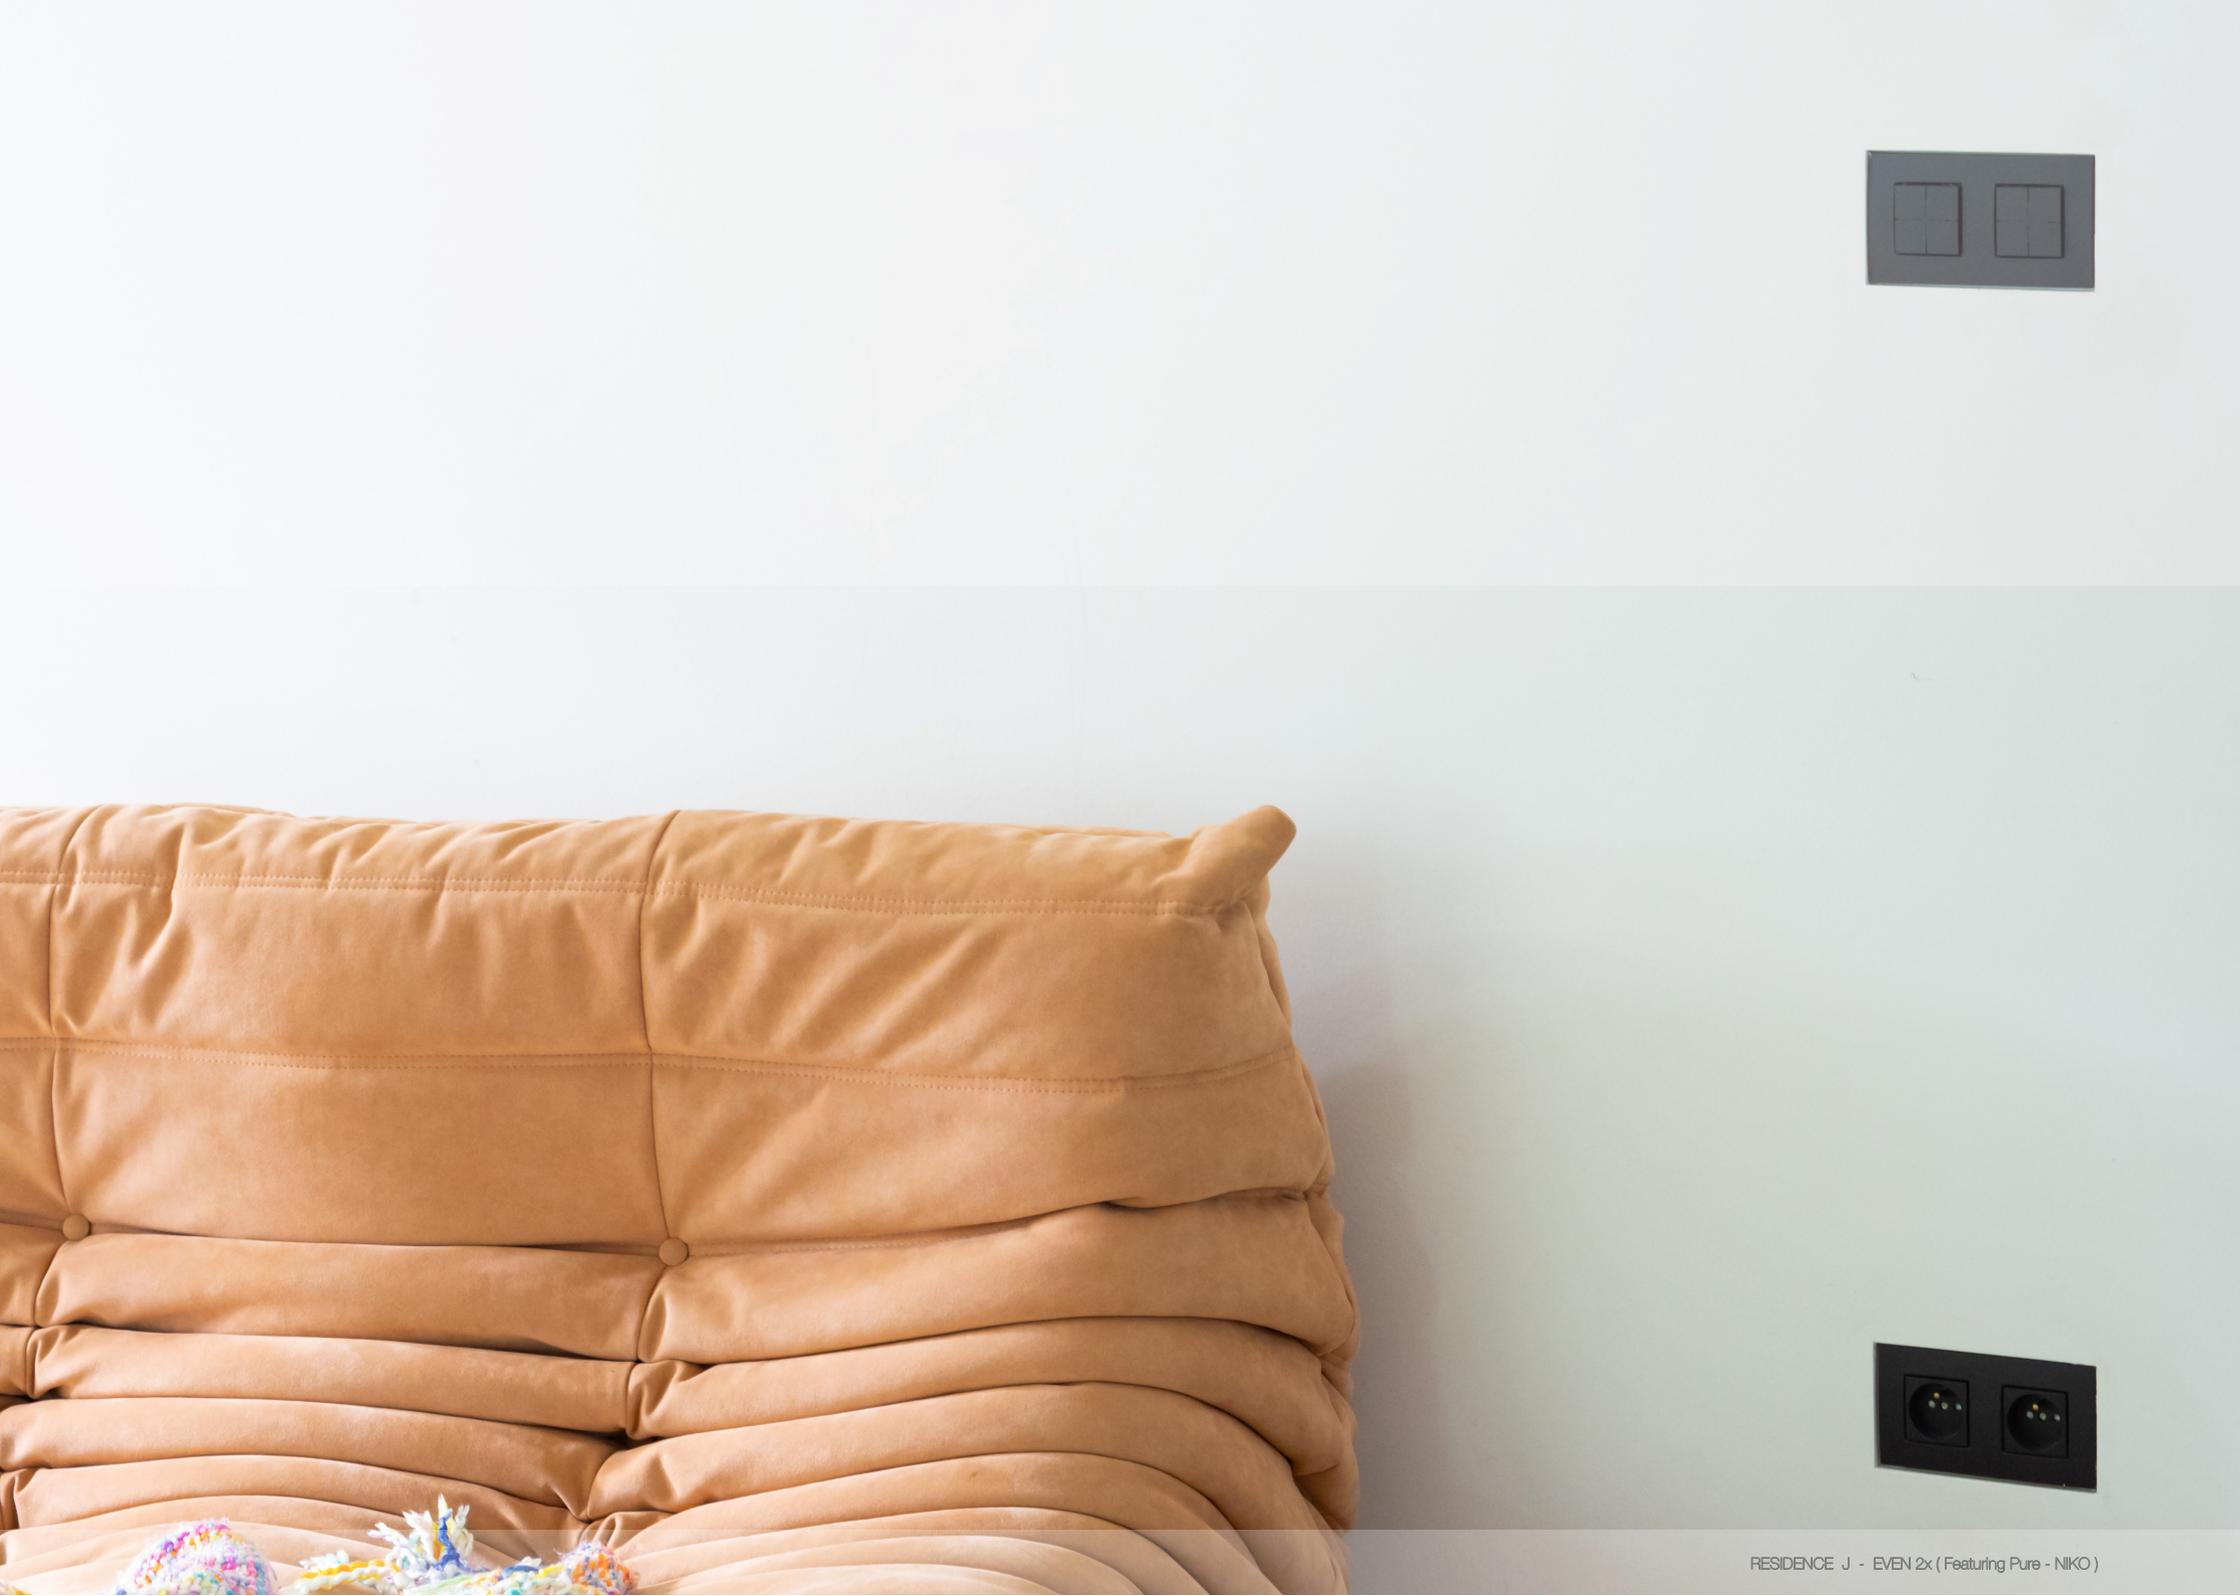



RESIDENCE J - EVEN 1x (Featuring Pure & Intense - NIKO)



OFFICE Z - EVEN 1x (Featuring Tastu® - Qbus) + AERO S Round C







OFFICE Z - EVEN 1x (Featuring Tastu® - Qbus) + AERO S Round C



RESIDENCE C - EVEN 1x (Featuring Pure - NIKO)

PRODUCTS



EVEN 1x p.6




EVEN 2x p.8




SMOOTH p.10



PHANTOM Twist p.12

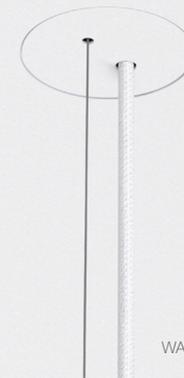

WAY OUT p.16



B-LIGHT p.28



C-LIGHT p.32



S-LIGHT p.34




AERO Small Round p.42



AERO Small Square p.48




AERO M-R p.52




Conversion kits p.56

EVEN 1x



PJ-EVEN-01-HW



PJ-EVEN-01-ST




Accessory: PJ-B1 (Hardware release tool)

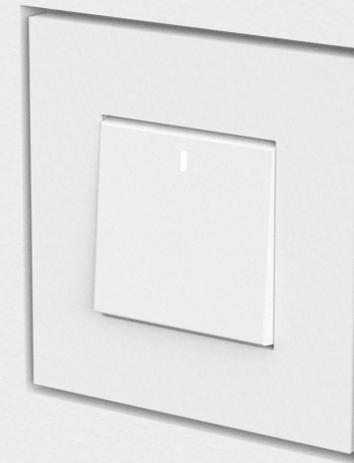


EVEN 2x


PJ-EVEN-02-HW



PJ-EVEN-02-ST




Accessory: PJ-B1 (Hardware release tool)




SMOOTH 2x


PJ-SMOOTH-02-HW (Frame only)




□ PJ-SMOOTH CV-LH WS





PJ-SMOOTH-02-ST (Frame only)



□ PJ-SMOOTH CV-LV WS




Accessory: PJ-B1 (Hardware release tool)

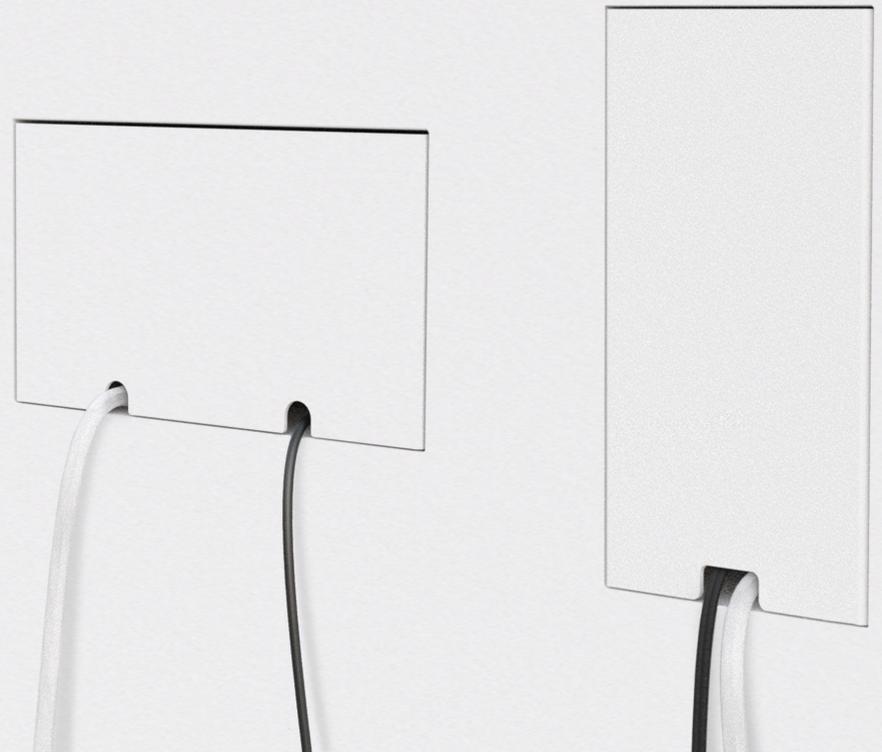



PHANTOM - Twist


PJ-PHANTOM-Twist-HW (Frame only)




PJ-PHANTOM-Twist-ST (Frame only)

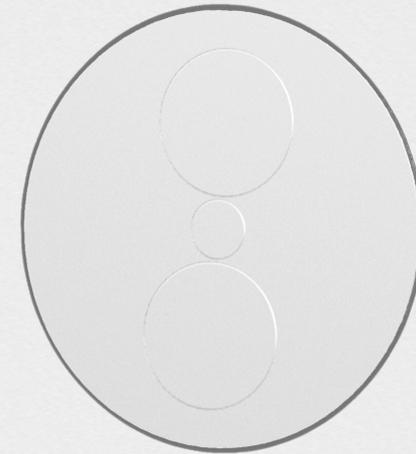


PJ-PHANTOM-Twist-HW (Frame only)



- BACHMANN-Twist Matt White 2x230V (B)
- BACHMANN-Twist Matt White 230V + 2x USB (B)
- BACHMANN-Twist Matt White 2x230V
- BACHMANN-Twist Matt White 230V / 2x USB



PJ-PHANTOM-Twist-ST (Frame only)



BACHMANN - TWIST Colors + Configurations*

- Matt Chrome
- Inox
- Gold
- Black
- White
- Yellow
- Blue
- Pink
- Green
- Light Grey
- Orange
- Red
- Brown




...
* Order anywhere




WAY-OUT / SET C


PJ-WAY-OUT-HW (Frame only)




PJ-WAY-OUT-R-ST (Frame only)



PJ-WAY-OUT-ST (Frame only)




□ PJ-WAY-OUT set C WS



Accessory: PJ-M1 (Magnetic release tool)




Connection set: Cable (ex. Cable)

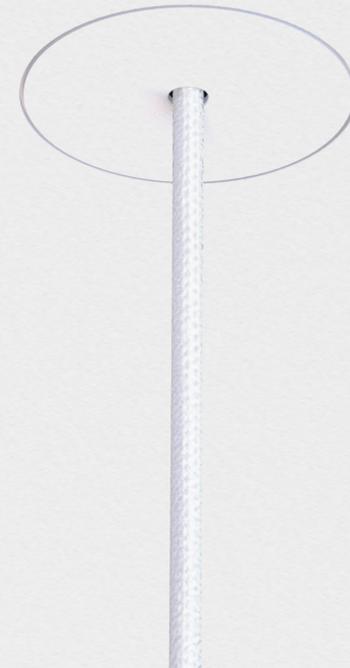


WAY-OUT / SET CS


PJ-WAY-OUT-HW (Frame only)




PJ-WAY-OUT-R-ST (Frame only)




PJ-WAY-OUT-ST (Frame only)




□ PJ-WAY-OUT set CS WS



Accessory: PJ-M1 (Magnetic release tool)




Connection set: Cable + suspension (ex. Cables)

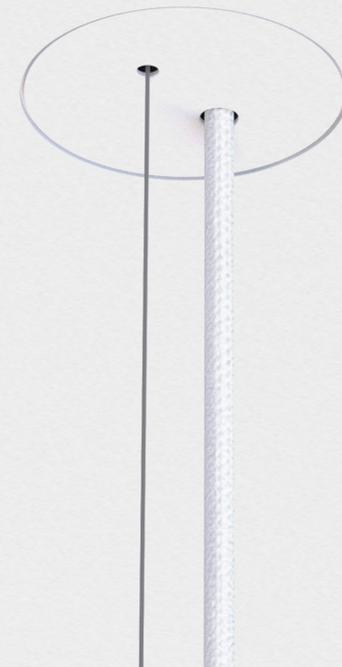


WAY-OUT / SET S


PJ-WAY-OUT-HW (Frame only)




PJ-WAY-OUT-R-ST (Frame only)




PJ-WAY-OUT-ST (Frame only)



□ PJ-WAY-OUT set S WS



Accessory: PJ-M1 (Magnetic release tool)




Connection set: suspension (ex. Cables)




WAY-OUT / SET CV


PJ-WAY-OUT-HW (Frame only)




PJ-WAY-OUT-R-ST (Frame only)



PJ-WAY-OUT-ST (Frame only)



□ PJ-WAY-OUT set CV WS




Accessory: PJ-M1 (Magnetic release tool)




WAY-OUT / SET L1


PJ-WAY-OUT-HW (Frame only)




PJ-WAY-OUT-R-ST (Frame only)




PJ-WAY-OUT-ST (Frame only)



□ PJ-WAY-OUT set L1 WS




Connection set: ex. Cables / ex. Lighting fixture

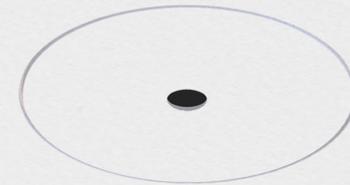


WAY-OUT / SET L2


PJ-WAY-OUT-HW (Frame only)




PJ-WAY-OUT-R-ST (Frame only)




PJ-WAY-OUT-ST (Frame only)



□ PJ-WAY-OUT set L2 WS




Connection set: ex. Cables / ex. Lighting fixture

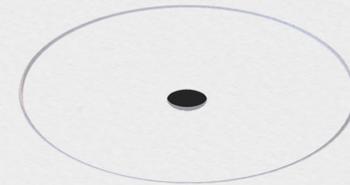


B-LIGHT


PJ-WAY-OUT-HW (Frame only)





PJ-WAY-OUT-R-ST (Frame only)



PJ-WAY-OUT-ST (Frame only)



- PJ-B-LIGHT WS 8W 2700K - AR70
- PJ-B-LIGHT BS 8W 2700K - AR70

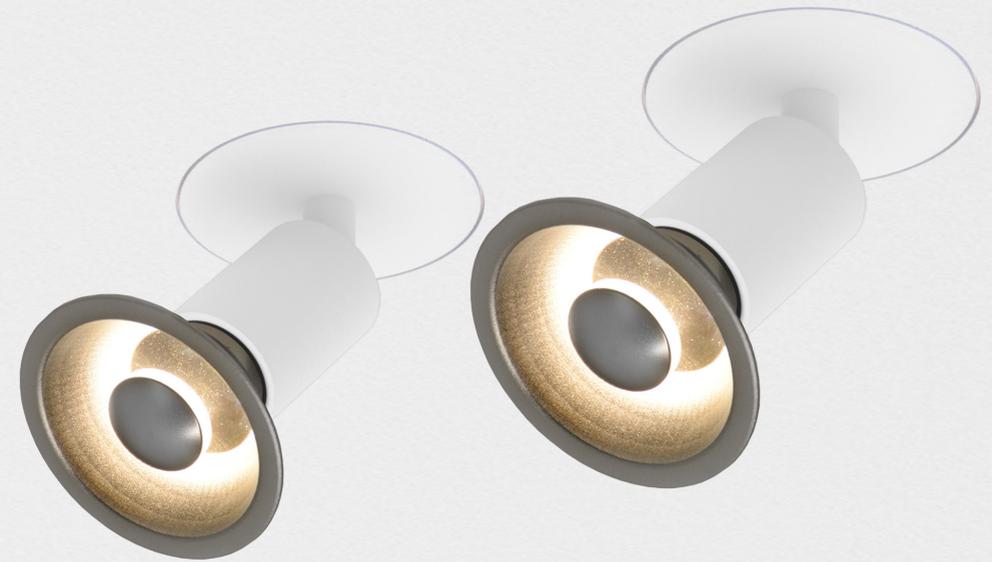


Technical Lighting Specification





set: including B-LIGHT fixture

- PJ-B-LIGHT CAP Low WS
- PJ-B-LIGHT CAP Low BS




- PJ-B-LIGHT CAP High WS
- PJ-B-LIGHT CAP High BS

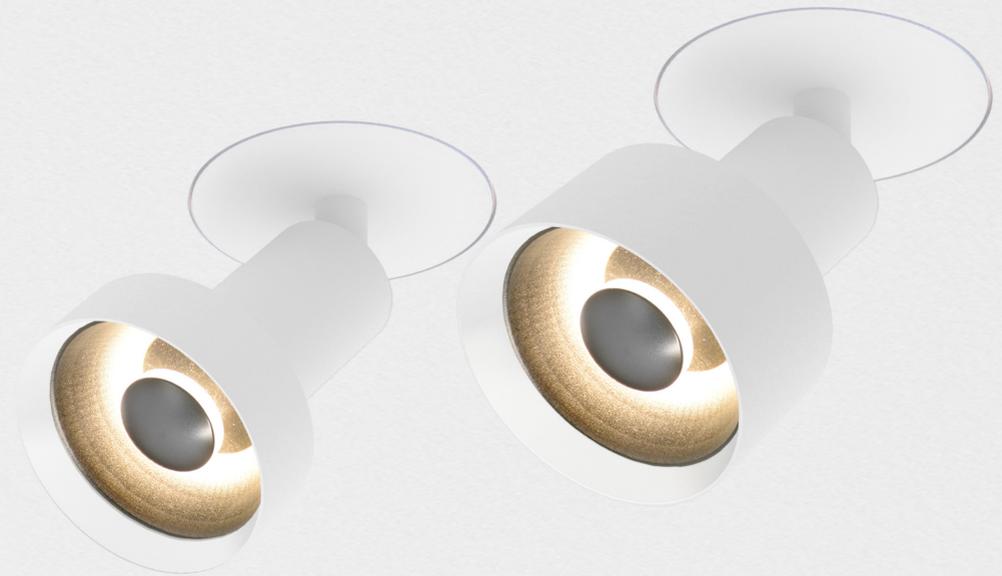


C-LIGHT


PJ-WAY-OUT-HW (Frame only)




PJ-WAY-OUT-R-ST (Frame only)



PJ-WAY-OUT-ST (Frame only)



- PJ-C-LIGHT WS 10W 2700K
- PJ-C-LIGHT BS 10W 2700K
- PJ-C-LIGHT WS 10W 3000K
- PJ-C-LIGHT BS 10W 3000K



Technical Lighting Specification


| | | | |
|--------------|---------------------|---------------------------------|--|
| LED | 220-240 V / 50-60Hz | CRI>95 | |
| 960°C | 40° | <0,1m> | |
| 8 | 100% | TRAILING EDGE/ PHASE CUT | |

set: including C-LIGHT fixture




S-LIGHT LED (Surface)

- S-LIGHT WS White 10W 2700K (Adj./ Dim/ Driver Incl.)
- S-LIGHT WS Black 10W 2700K (Adj./ Dim/ Driver Incl.)
- S-LIGHT WS White 10W 3000K (Adj./ Dim/ Driver Incl.)
- S-LIGHT WS Black 10W 3000K (Adj./ Dim/ Driver Incl.)



- S-LIGHT LS White 10W 2700K (Adj./ Dim/ Driver Incl.)
- S-LIGHT LS Black 10W 2700K (Adj./ Dim/ Driver Incl.)
- S-LIGHT LS White 10W 3000K (Adj./ Dim/ Driver Incl.)
- S-LIGHT LS Black 10W 3000K (Adj./ Dim/ Driver Incl.)




Technical Lighting Specification


| | | | | |
|--------------|----------------------------------|------------------|-----------|--------------|
| LED | 220-240 V / 50-60Hz | CRI>95 | | IP 20 |
| 960°C | | | | |
| 100% | INCL TRIAC / LEADING EDGE | | CE | |

S²-LIGHT LED


PJ-WAY-OUT-HW (Frame only)



PJ-WAY-OUT-ST (Frame only)




- S-LIGHT WS White 10W 2700K (Adj./ Dim/ Driver Incl.)
- S-LIGHT WS Black 10W 2700K (Adj./ Dim/ Driver Incl.)
- S-LIGHT WS White 10W 3000K (Adj./ Dim/ Driver Incl.)
- S-LIGHT WS Black 10W 3000K (Adj./ Dim/ Driver Incl.)



30° Ø68

- S-LIGHT LS White 10W 2700K (Adj./ Dim/ Driver Incl.)
- S-LIGHT LS Black 10W 2700K (Adj./ Dim/ Driver Incl.)
- S-LIGHT LS White 10W 3000K (Adj./ Dim/ Driver Incl.)
- S-LIGHT LS Black 10W 3000K (Adj./ Dim/ Driver Incl.)



30° Ø68




Technical Lighting Specification


| | | | | |
|------------|---------------------|----------------------|--|-----------|
| LED | 220-240 V / 50-60Hz | CRI>95 | | |
| 960°C | 40° | <0,1m> | | |
| 100% | INCL | TRIAC / LEADING EDGE | | CE |

S²-LIGHT GU10

PJ-WAY-OUT-HW (Frame only)




PJ-WAY-OUT-ST (Frame only)



- S-LIGHT WS White GU10
- S-LIGHT WS Black GU10



- S-LIGHT LS White GU10
- S-LIGHT LS Black GU10




Technical Lighting Specification


GU10 220-240 V / 50-60Hz Max: 11W 960°C

AERO Small Round - Cover C


PJ-AERO-S-R-HW (Frame only)



PJ-AERO-S-R-ST (Frame only)




PJ-AERO-S-R-COVER C White



Accessory:


PJ-B1 (Hardware release tool)



PJ-AERO Collar Ø 125




PJ-AERO-S-R-FELT AIR VENTIL




| Qv (m³/h) | | | | |
|-----------|--------------------------|----|--------------------------|----|
| | ΔP_{supply} [Pa] | dB | ΔP_{supply} [Pa] | dB |
| 15 | 0 | 2 | 0 | 4 |
| 25 | 2 | 4 | 5 | 5 |
| 40 | 13 | 14 | 15 | 10 |
| 50 | 20 | 15 | 25 | 12 |
| 65 | 36 | 23 | 43 | 18 |
| 75 | 52 | 31 | 60 | 29 |

AERO Small Round - Cover S


PJ-AERO-S-R-HW (Frame only)



PJ-AERO-S-R-ST (Frame only)




PJ-AERO-S-R-COVER S White



Accessory:



PJ-B1 (Hardware release tool)



PJ-AERO Collar Ø 125




PJ-AERO-S-R-FELT AIR VENTIL

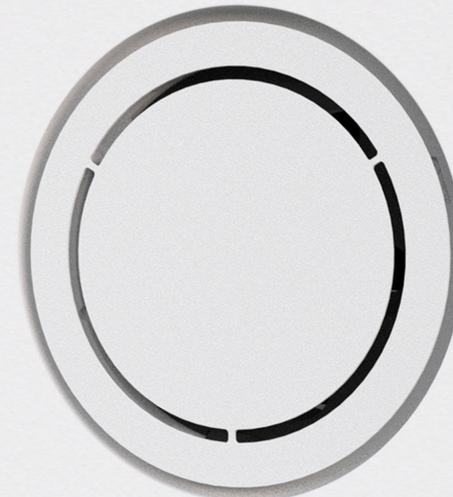


| Qv (m³/h) |  | |  | |
|-----------|---|----|---|----|
| | ΔP_{supply} [Pa] | dB | ΔP_{supply} [Pa] | dB |
| 15 | 0 | 2 | 0 | 4 |
| 25 | 0 | 3 | 2 | 5 |
| 40 | 3 | 12 | 6 | 7 |
| 50 | 6 | 14 | 11 | 9 |
| 65 | 12 | 20 | 21 | 12 |
| 75 | 17 | 25 | 29 | 17 |

AERO Small Round - Cover H


PJ-AERO-S-R-HW (Frame only)



PJ-AERO-S-R-ST (Frame only)




PJ-AERO-S-R-COVER H White



Accessory:



PJ-B1 (Hardware release tool)



PJ-AERO Collar Ø 125




PJ-AERO-S-R-FELT AIR VENTIL

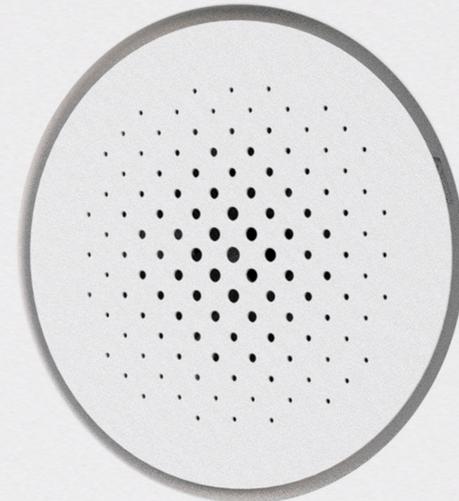


| Qv (m³/h) |  | |  | |
|-----------|---|----|---|----|
| | ΔP_{supply} (Pa) | dB | ΔP_{supply} (Pa) | dB |
| 15 | 0 | 2 | 0 | 4 |
| 25 | 2 | 4 | 3 | 5 |
| 40 | 6 | 14 | 10 | 8 |
| 50 | 11 | 15 | 18 | 10 |
| 65 | 21 | 17 | 30 | 16 |
| 75 | 31 | 25 | 40 | 23 |

AERO Small Square - Cover C


PJ-AERO-S-SQ-HW (Frame only)



PJ-AERO-S-SQ-ST (Frame only)




PJ-AERO-S-SQ-COVER C White



Accessory:



PJ-B1 (Hardware release tool)



PJ-AERO Collar Ø 125




PJ-AERO-S-R-FELT AIR VENTIL

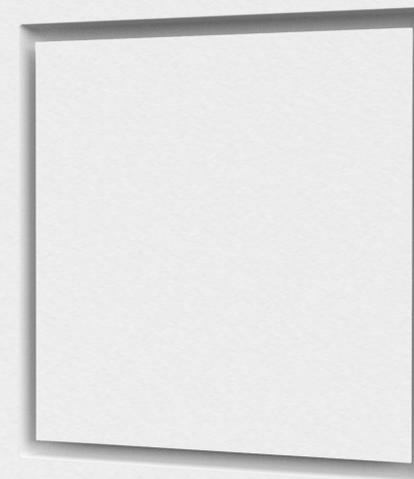


| Qv (m³/h) | Ø125 | | Ø170 | |
|-----------|--------------------------|----|--------------------------|----|
| | ΔP_{supply} [Pa] | dB | ΔP_{supply} [Pa] | dB |
| 15 | 0 | 2 | 0 | 0 |
| 25 | 1 | 4 | 2 | 2 |
| 40 | 7 | 7 | 9 | 5 |
| 50 | 11 | 9 | 14 | 10 |
| 65 | 21 | 14 | 26 | 14 |
| 75 | 30 | 26 | 39 | 22 |

AERO Small Square - Cover S


PJ-AERO-S-SQ-HW (Frame only)



PJ-AERO-S-SQ-ST (Frame only)




PJ-AERO-S-SQ-COVER S White



Accessory:



PJ-B1 (Hardware release tool)



PJ-AERO Collar Ø 125




PJ-AERO-S-R-FELT AIR VENTIL

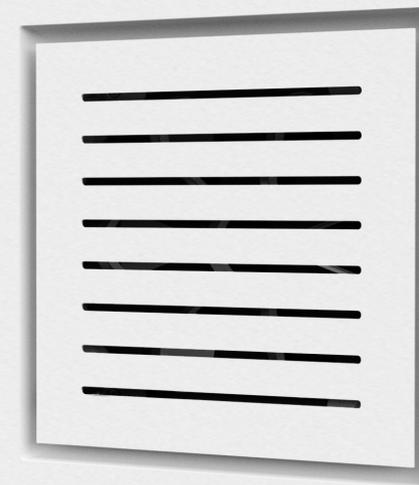


| Qv (m³/h) |  | |  | |
|-----------|---|----|---|----|
| | ΔP_{supply} [Pa] | dB | ΔP_{supply} [Pa] | dB |
| 15 | 0 | 0 | 0 | 0 |
| 25 | 0 | 3 | 0 | 2 |
| 40 | 1 | 4 | 4 | 3 |
| 50 | 2 | 6 | 8 | 7 |
| 65 | 5 | 8 | 14 | 11 |
| 75 | 6 | 12 | 21 | 16 |

AERO Medium Round - Cover C

PJ-AERO-M-R-HW (Frame only)




PJ-AERO-M-R-ST (Frame only)



PJ-AERO Collar Ø125 PJ-AERO-S-R-FELT AIR VENTIL




PJ-AERO-M-R-COVER C White




Accessory:

PJ-B1 (Hardware release tool)




| Qv (m³/h) | PULSE | | EXTRACT | | PULSE | | EXTRACT | |
|--------------|------------------------------|----|------------------------------|----|------------------------------|----|------------------------------|----|
| | ΔP _{static} (Pa) | dB |
| 25 | 1 | 4 | 2 | 4 | 1 | 4 | 1 | 4 |
| 50 | 2 | 15 | 8 | 15 | 2 | 13 | 4 | 13 |
| 75 | 6 | 17 | 14 | 18 | 6 | 15 | 15 | 16 |
| 100 | 9 | 19 | 24 | 20 | 15 | 19 | 27 | 20 |
| 125 | 12 | 20 | 38 | 27 | 28 | 25 | 45 | 28 |
| 150 | 19 | 25 | 54 | 35 | 40 | 32 | | |
| 175 | 26 | 31 | | | | | | |
| 200 | 34 | 35 | | | | | | |

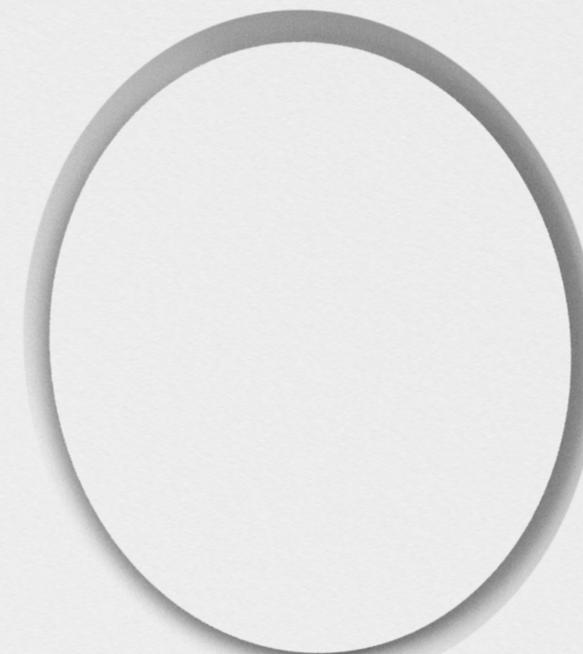


FLOS Conversion Kits Drywall-to-Concrete


PJ-F-FM1-ST (Frame only) - Conversion kit for Find Me 1
(Compatible with Flos Ref Find Me 1: 09.3750 / 09.3751)



PJ-F-LS-DOTS-ST (Frame only) - Conversion kit for Light Shadow Dots
(Compatible with Single frame - Flos ref: 08.0580.00)



PJ-F-LS-60-F-ST (Frame only) - Conversion kit for Light Shadow 60 Fixed
(Compatible with Flos Ref: 08.0192.00)



PJ-F-LS-60-A-ST (Frame only) - Conversion kit for Light Shadow 60 Adjustable
(Compatible with Flos Ref: 08.0166.00)

